

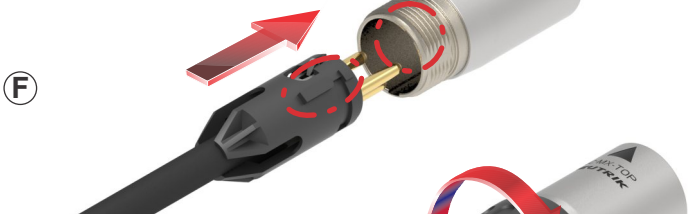


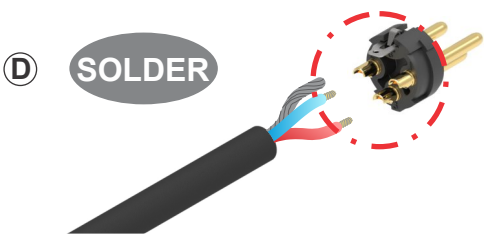

ASSEMBLY INSTRUCTION

NC3MX-TOP & NC5MX-TOP | XLR Cable Connector


IP65 RATED AND UL50E APPROVED.

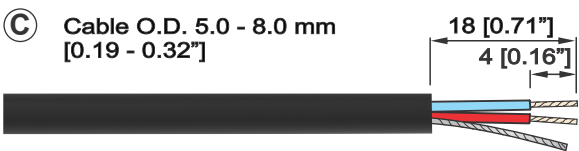

- A** Cut cable end approx. 45°.
- B** Slide the bushing over the cable.

To ease the boot assembly apply some cable pulling lubricant to the cable ends.

- C** Prepare cable as shown.
- D** Insert wires into the terminals and SOLDER them.

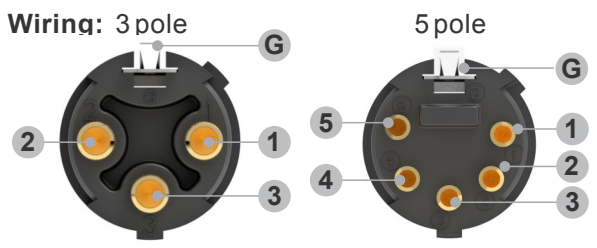

Put chuck onto the cable.


Attention: Pay attention to the guiding key.

- F** Slide insert and chuck together into the housing.

Important: Align the insert by positioning as shown.

- G** Finish the installation by turning the bushing onto the connector.

Attention: Screw the bushing to the end of the thread.

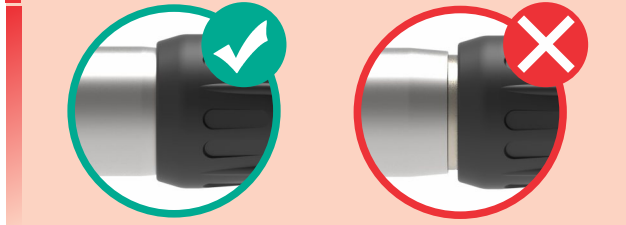

NEUTRIK AG	LI	T: +423/237 24 24	F: +423/232 53 93	NEUTRIK France	FR	T: +33 1/4131 6750	F: +33 1/4131 0511
NEUTRIK USA Inc.	USA	T: +1 704 / 972 3050	F: +1 704/438 9202	NEUTRIK Tokyo Ltd.	JP	T: +81 3/3663 4733	F: +81 3/3663 4796
NEUTRIK (UK) Ltd.	UK	T: +44 1983 / 811 441	F: +44 1983/811 439	NEUTRIK Hong Kong Ltd.	HK	T: +852/2687 6055	F: +852/2687 6052
NEUTRIK Vertriebs GmbH	DE/NL/AT/DK	T: +49 8131 / 280 890	F: +49 8131/280 830	NEUTRIK India Pvt. Ltd.	IND	T: +91/982 05 43 424	F: +91/22 26163 540

Draft. Nr.: BDA 550 | Update: 06.09.2018 | Data subject to change without prior notice. ©2018 NEUTRIK®. ALL RIGHTS RESERVED. NEUTRIK® is a registered trademark.