

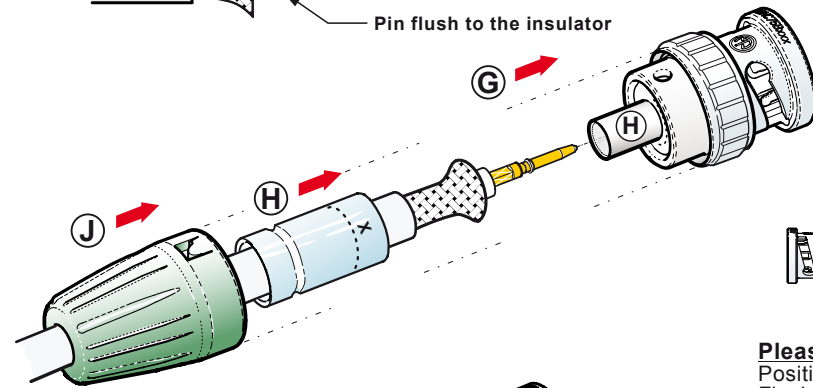

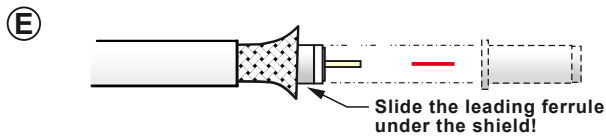
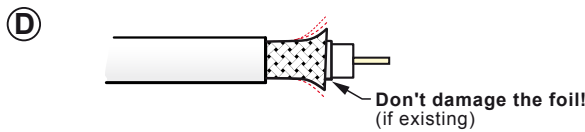


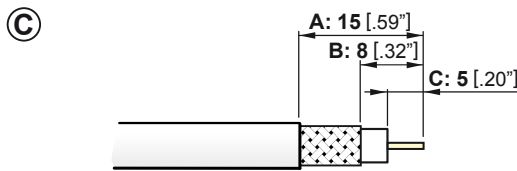


# ASSEMBLY INSTRUCTION


## Rear Twist BNC - Tiny | 75Ω Cable Connector - Crimp version

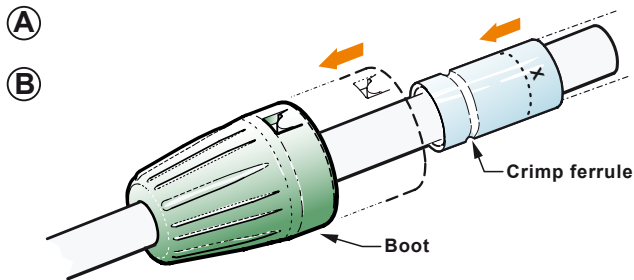

Assembled Connector

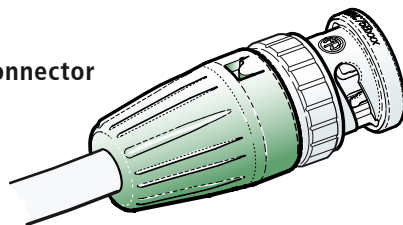


- A** Slide the boot onto the cable
- B** Slide the crimp ferrule onto the cable
- C** Prepare cable as shown
  - Use an adjustable coaxial cable stripper

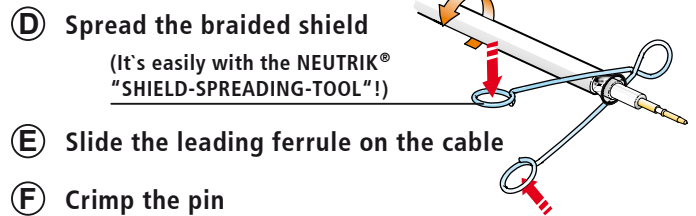

- D** Spread the braided shield  
(It's easily with the NEUTRIK® "SHIELD-SPREADING-TOOL"!)
  - position the pin on the center conductor
  - Crimp the pin with the tool
- E** Slide the leading ferrule on the cable
  - For best crimping-results it is recommended to use the original Neutrik crimp tool
  - HXBNC with the corresponding insert
  - or hexcrimp acc. to IEC 803-W (SW 1.7)
  - or squarecrimp acc. to IEC 803-2 (SW 1.6)
  - Pin can also be soldered (Optional)
  - Straighten the pin if misaligned.

- G** Insert the cable into the connector body
- H** Slide the crimp ferrule over the shield to the front and push the cable and leading ferrule to it's end position until you hear a snap noise.

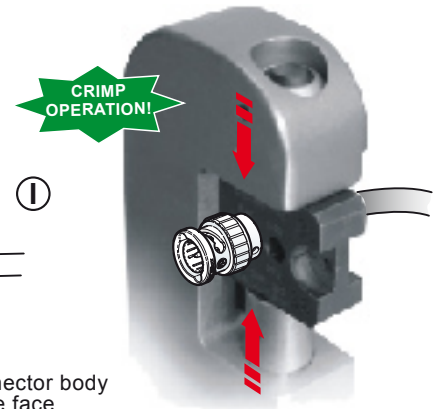

**Please note:**  
Position the connector body  
Flush with the die face.

- I** Crimp the ferrule with the tool  
(For best crimping-results it is recommended to use the original Neutrik tool - HXBNC with the corresponding insert)
- J** Snap the boot onto the connector body

NEUTRIK AG LI T: +423 / 237 24 24 F: +423 / 232 53 93  
 NEUTRIK Z, rich AG CH T: +41 44 / 736 5010 F: +41 44 / 736 5011  
 NEUTRIK USA Inc. USA T: +1 732 / 901 9488 F: +1 732 / 901 9608  
 NEUTRIK (UK) Ltd. UK T: +44 1983 / 811 441 F: +44 1983 / 811 439

NEUTRIK Vertriebs GmbH DE/NL/AT T: +49 8131 / 280 890 F: +49 8131 / 280 830  
 NEUTRIK France FR T: +33 1 / 4131 6750 F: +33 1 / 4131 0511  
 NEUTRIK Tokyo Ltd. JP T: +81 3 / 3663 4733 F: +81 3 / 3663 4796  
 NEUTRIK Hong Kong Ltd. HK T: +852 / 2687 6055 F: +852 / 2687 6052