





# ASSEMBLY INSTRUCTION

## etherCON® | NE8MX & NE8MX-B

### Ruggedized RJ45 Data Cable Connector Carrier

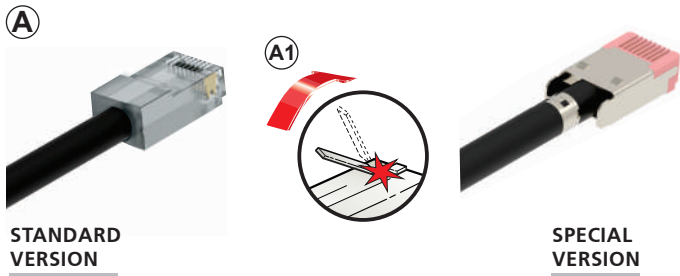


- Ⓐ Special version remove the cover.
- Ⓐ1 Cut off the release tab of RJ45 plug.

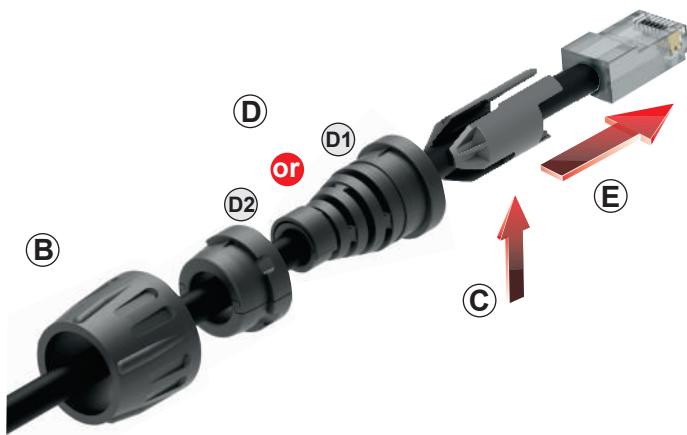


- Ⓑ Slide the bushing over the connector onto the cable.
- Ⓒ Put the chuck onto the cable. Align the opening with the contact side.
- Ⓓ Put the suitable boot on the cable:
  - D1: for cable O.D. 4.5 [0.18"] to 5 mm [0.2"]
  - D2: for cable O.D. 5.0 [0.2"] to 8 mm [0.3"]

STANDARD VERSION

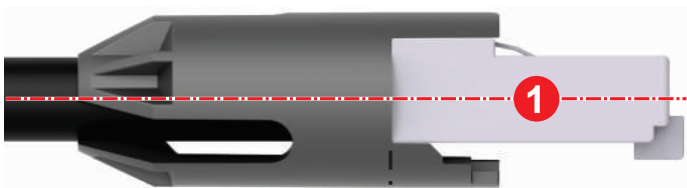


SPECIAL VERSION

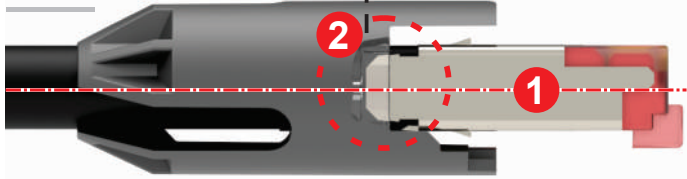


- Ⓔ Position the RJ45 in the chuck.

#### Attention:

- 1 RJ45 must be straight.
- 2 Special versions must engage in the inner recess of the chuck.

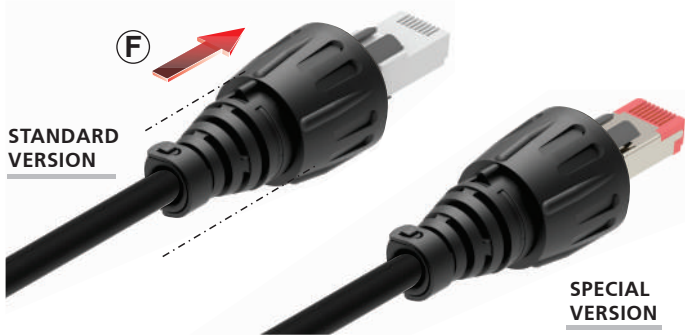

**F** Position the bushing onto the chuck.

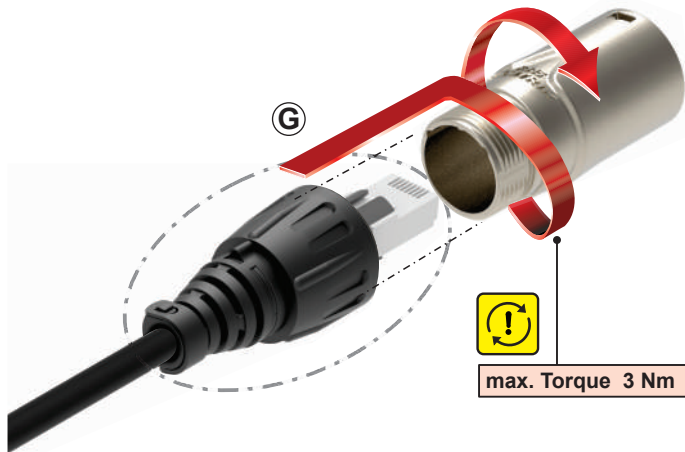

**G** Slide the unit (insert and boot) into the housing and tighten the bushing with **max. torque 3 Nm (2.2 lb-ft).**



**H** CAUTION:

**There is no overlap allowed.**



**I** Close the seal of the boot.

**FINISHED etherCON® NE8MX:**

Find more etherCON® details on [www.neutrik.com](http://www.neutrik.com).



|                        |             |                       |                     |
|------------------------|-------------|-----------------------|---------------------|
| NEUTRIK AG             | LI          | T: +423/237 24 24     | F: +423/232 53 93   |
| NEUTRIK USA Inc.       | USA         | T: +1 704 / 972 3050  | F: +1 704/438 9202  |
| NEUTRIK (UK) Ltd.      | UK          | T: +44 1983 / 811 441 | F: +44 1983/811 439 |
| NEUTRIK Vertriebs GmbH | DE/NL/AT/DK | T: +49 8131 / 280 890 | F: +49 8131/280 830 |

|                         |     |                      |                     |
|-------------------------|-----|----------------------|---------------------|
| NEUTRIK France          | FR  | T: +33 1/4131 6750   | F: +33 1/4131 0511  |
| NEUTRIK Tokyo Ltd.      | JP  | T: +81 3/3663 4733   | F: +81 3/3663 4796  |
| NEUTRIK Hong Kong Ltd.  | HK  | T: +852/2687 6055    | F: +852/2687 6052   |
| NEUTRIK India Pvt. Ltd. | IND | T: +91/982 05 43 424 | F: +91/22 26163 540 |

Draft. Nr.: BDA 563-V2 | Update: 22.05.2019 | Data subject to change without prior notice. ©2019 NEUTRIK®. ALL RIGHTS RESERVED. NEUTRIK® & etherCON® are registered trademark.