


3Gbit SDI to Fiber Optic Transmitter (CWDM)

- Supports SDI video inputs up to 3Gbit/s (1080p60)
- 3Gbit Level A and Level B support (all formats)
- Auto relocking 270Mbit / 1.5Gbit / 3Gbit
- Relocked SDI loop output
- 18 wavelength selections (ITU-T G.694.2)
- Error free optical transmission
- Up to 40km (24.85 miles) @ 3Gbit
- Simplex LC singlemode optical connection
- Supports hot swapping and hot plugging

The OTX 1842 is a compact CWDM SDI to fiber optic transmitter designed to combat the restrictions involved with the distribution of uncompressed broadcast quality video signals over long distances.

When paired with the fiber optic to SDI receiver (e.g. yellobrik ORX 1802) you have a very cost-effective optical transmission / receiver system for signals up to 1080p60 (3Gbit/s), while preserving full uncompressed quality. Select from 18 wavelengths for full CWDM compatibility.

The OTX 1842 will auto-detect and re-clock any 270Mbit / 1.5Gbit and 3Gbit SDI source prior to optical transmission. The module is fully compatible with 3Gbit Level A and Level B formats.

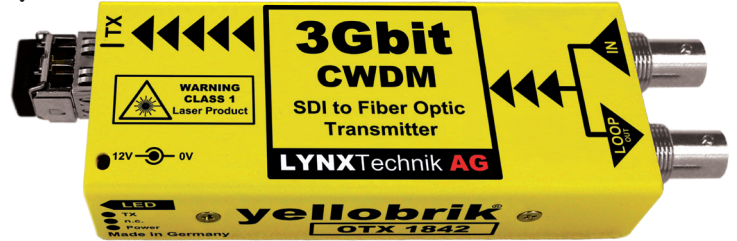

Technical Specifications

Input	1 x SDI video on 75 Ohm BNC connector with relocked loop output SMPTTE 424M, SMPTTE 292M, SMPTTE 259M, DVB-ASI Multi-standard operation from 270Mbit/s to 3Gbit/s Multi-rate relocking 270Mbit/s - 1.5Gbit/s - 3Gbit/s Electrical Return Loss: >15dB from 5MHz to 1.5GHz, >10dB from 1.5GHz to 3GHz Automatic cable EQ (Belden 1694A cable) 340m @ 270Mbit/s, 150m @ 1.5Gbit/s, 120m @ 3Gbit/s
Optical Output	1 x fiber optic output Simplex (singlemode) using LC Connection SMPTTE 297M - 2006 Hot pluggable 18 Wavelength selections per ITU-T G.694.2 (see table) TX active LED on side of module Max. distance approx. 40km (24.8 miles) @ 3Gbit/s (single model)
Power	+12VDC @ 1.3W nominal without SFP +12VDC @ 1.8W nominal with SFP (supports 7 - 16VDC input range)
Physical	Size: 140mm x 42mm x 22mm (5.51" x 1.65" x 0.86") including connectors Weight: 125g (4.4oz)
Ambient	5 - 40°C (41 - 104°F) 90% Humidity (non condensing)
Model #	OTX 1842 - (EAN# 4250479359857)
Includes	Module, AC power supply

Power Adapter Options

The kit **INCLUDES** AC power supplies. The power adapters below are optional.



P-TAP 1000

Use with a standard battery P-TAP power source.



XLR 1000

Use with a standard 4 pin XLR camera battery power source.

Ordering Info:


Note: The **OTX 1842** price **DOES NOT INCLUDE** the fiber transmitter SFP sub module. Please specify the required wavelength from the option list below.

CWDM Wavelength Options. ITU-T G.694.2 (select one)


Wavelength	Power	Option #	Wavelength	Power	Option #
1270nm	-1dBm	OH-TX-4-1270	1450nm	-1dBm	OH-TX-4-1450
1290nm	-1dBm	OH-TX-4-1290	1470nm	-1dBm	OH-TX-4-1470
1310nm	-1dBm	OH-TX-4-1310	1490nm	-1dBm	OH-TX-4-1490
1330nm	-1dBm	OH-TX-4-1330	1510nm	-1dBm	OH-TX-4-1510
1350nm	-1dBm	OH-TX-4-1350	1530nm	-1dBm	OH-TX-4-1530
1370nm	-1dBm	OH-TX-4-1370	1550nm	-1dBm	OH-TX-4-1550
1390nm	-1dBm	OH-TX-4-1390	1570nm	-1dBm	OH-TX-4-1570
1410nm	-1dBm	OH-TX-4-1410	1590nm	-1dBm	OH-TX-4-1590
1430nm	-1dBm	OH-TX-4-1430	1610nm	-1dBm	OH-TX-4-1610

Fiber Adapter Options

These adapter kits allow the use of ST or SC fiber connections on the module. SMF 0.5m (19.6") tail introduces less than 0.25dB attenuation.



Model# **LC/SC SIM**
LC/PC to SC/PC Adapter



Model# **LC/ST SIM**
LC/PC to ST/SC Adapter

Specifications subject to change